



# NEOPLAST™

Next-Generation  
Plastering

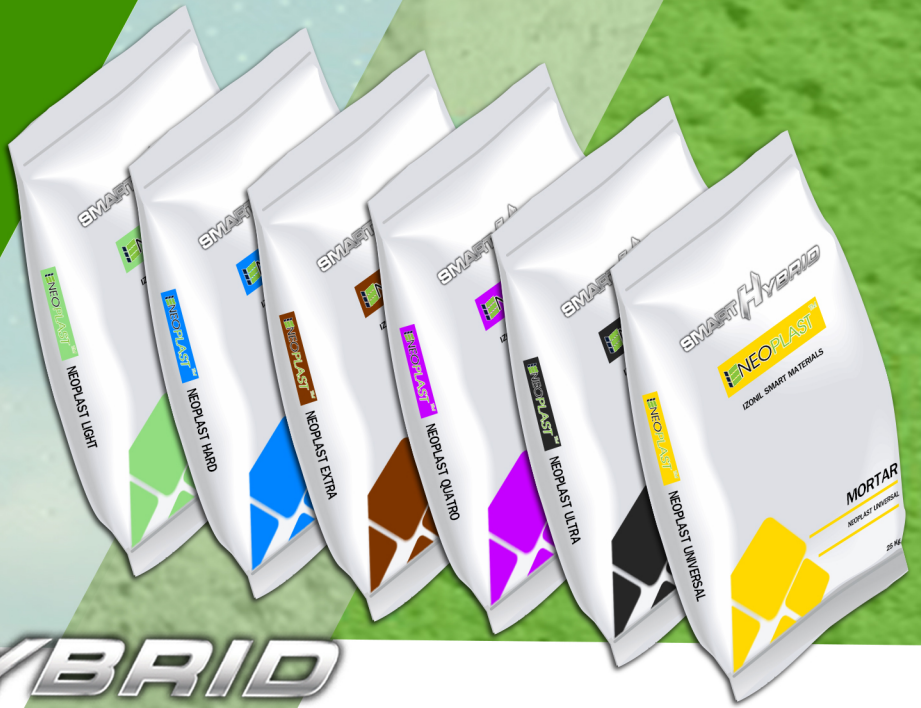


## SMART HYBRID


PLASTER RENDER  
SKIM COAT

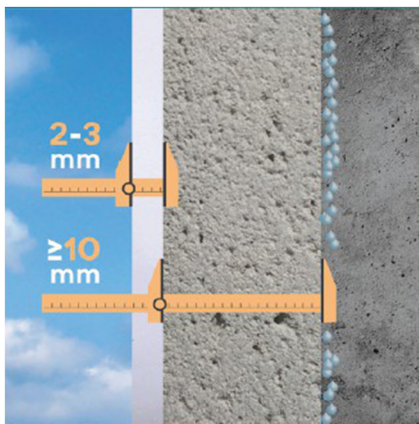

100%  
WATERPROOF SYSTEM

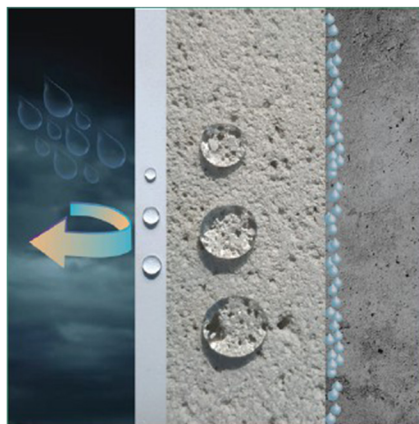

100%  
DRYING SYSTEM

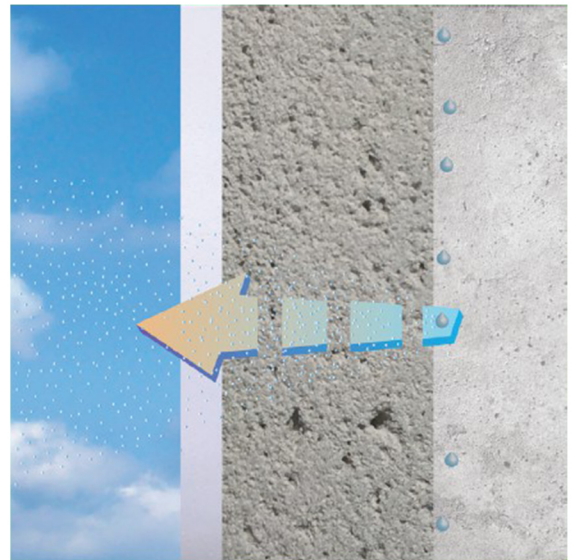

A GREEN PRODUCT 

Standard TIS. 

# NEOPLAST™

"DRYMIX/READYMIX"

100% Waterproof  
Dehumidifying &  
Drying System (WDS)

1

3.7 - 4 Liters  
of water



2

5 Minutes  
Mixing Time



3

5 Minutes  
REST  
Time



4

1 Minutes  
Mixing Time



2-4 SQM @5-10 mm  
Thickness

**NEOPLAST UNIVERSAL**  
For External/Internal

**NEOPLAST LIGHT**  
For External/Internal and Bathroom

**NEOPLAST HARD**  
For Roof , Basement & Pool

**NEOPLAST EXTRA**  
For Roof & Pool (Precast Structures)

**NEOPLAST QUATRO**  
Waterproof/Soundproof/Insulation

**NEOPLAST ULTRA (AAC/CLC Block)**  
For External/Internal and Bathroom

**ICM TECH**

ICM Technology (Thailand) Co., Ltd.

16 Soi Phattanakan 54, Suan Luang, Bangkok, Thailand 10250

Tel: +66(0)2 115 2242 Fax: +66(0)2 115 5442

Email: sales@icmtechglobal.com

